

## Светильник DL180A-11W White

### Features:


- Size:  $\Phi 180 \times 12 \text{mm}$  (108 LEDs)
- Colour: White
- Net weight: 325g
- LED package: 3528
- Printed circuit board thickness: 0.2mm
- PCB material: FPC
- Cold-rolled plate as the bottom with aluminum + PMMA cover
- Energy-saving, high brightness, long lifespan, environmental protection, safe
- free of mercury and other harmful material
- Easy for installation
- 2 Years Warranty



### Product Features:

Input voltage(AC)	85~265V
Working current	500mA
Working voltage(DC)	18V
Power	10W
Luminous flux	700±50 Lm
Color temperature	5500-7500 K
Dimensions	$\Phi 180 \times 12 \text{mm}$
Working temperature	-30~+50 °C
Storage humidity	10% ~ 90% RH
Power factor	0.8±0.05(With power)
LED view angle ( $2\theta_{1/2}$ )	120°

### Dimension (Unit:mm):

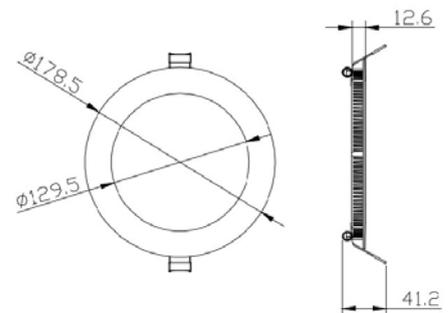


**Note:** Absolute maximum rating at  $T_A=25^\circ\text{C}$

### Application:

- Hotels
- Conference / Meeting rooms
- Factories & Offices
- Commercial Purposes.
- Residential / Institution Buildings
- Schools, Colleges & Universities

### Photometric curve:

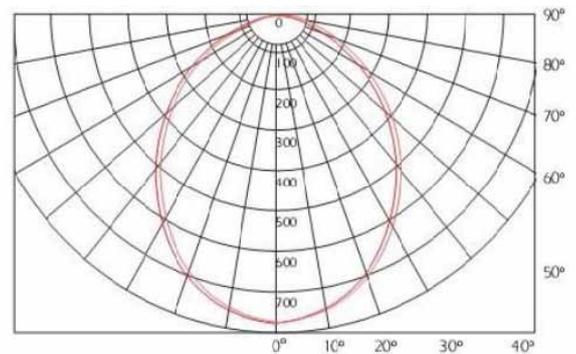

### Package:



1 pcs



1pcs / carton

### Illumination table:

Height	LUX
1m	250
2.0m	103
2.5m	62
3.0m	43

**Note:** The above parameters are for reference only, are subject to change without further notice